



3MHYT CiTiceL[®]

Standard mV output CiTiceL[®]

Performance Characteristics

Sensor Type Used	3HYT
Expected Operating Life	Two years in air
Output Signal	1mV/ppm (±5%)
Maximum Range	0-2000ppm
Resolution	2ppm
Maximum Zero Output	0 ± 2mV
Maximum Zero Shift (+20°C to +40°C)	-35ppm equivalent
Temperature Range	-20°C to +50°C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	0.009% signal/mBar
T₉₀ Response Time	≤30 seconds
Relative Humidity Range	15 to 90% non-condensing
Long Term Output Drift	<2% of full signal/month
Repeatability	2% of signal
Output Linearity	Linear


N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

Electrical Properties

Power Supply Required	7 to 18V d.c. single ended or ± 3.5 to ± 9V d.c. dual
Power Consumption	250µA @ 9V d.c.
Calibration	Via built-in span and zero potentiometers


Physical Characteristics

Weight	38g (with connector)
Position Sensitivity	None
Storage Life	Six months in CTL container
Recommended Storage Temperature	0-20°C
Warranty Period	12 months from date of despatch

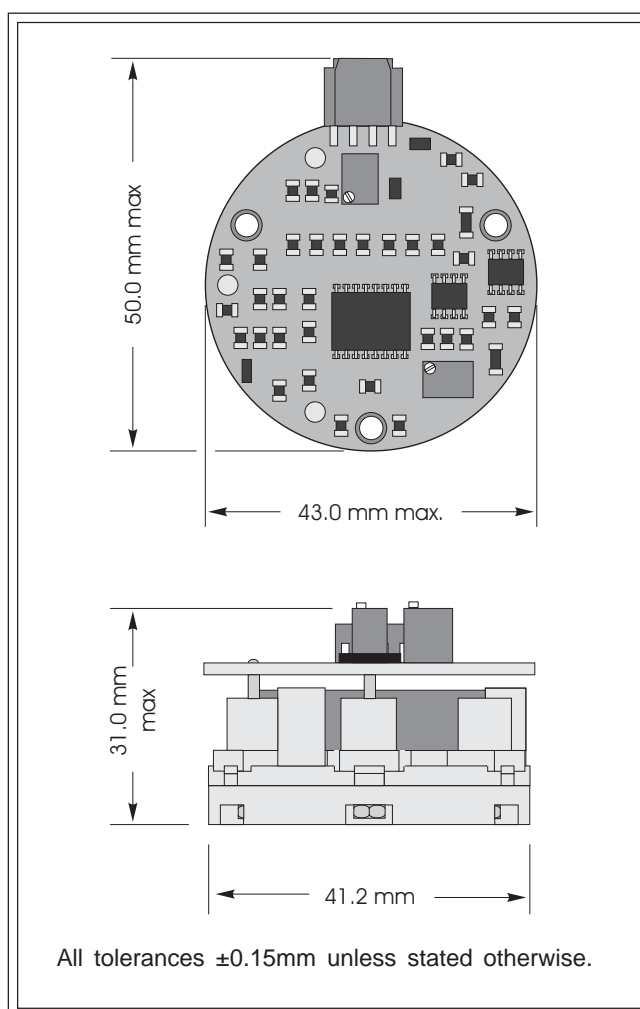



3HYT Hydrogen - Output vs Temperature

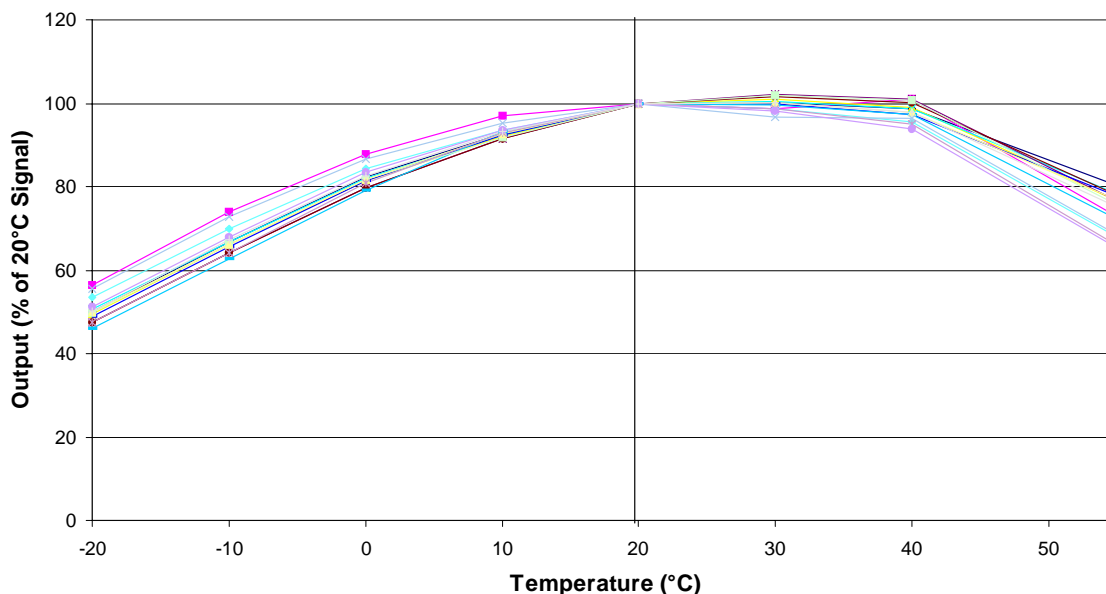

Cross-sensitivity Data

CiTiceLs may exhibit a response to certain gases in a sample other than the target gas. 3HYT CiTiceLs have been tested with a number of commonly cross-interfering gases and the results are given below. The table shows the typical response to be expected from a sensor when exposed to a given test gas concentration (relevant to safety, e.g. TLV levels).

Gas	Conc.	3HYT	Gas	Conc.	3HYT
Carbon monoxide:	300ppm	≤60ppm	Chlorine:	1ppm	0ppm
Hydrogen sulphide:	15ppm	<3ppm	Hydrogen cyanide:	10ppm	≈3ppm
Sulphur dioxide:	5ppm	0ppm	Hydrogen chloride:	5ppm	0ppm
Nitric oxide:	35ppm	≈10ppm	Ethylene:	100ppm	≈80ppm
Nitrogen dioxide:	5ppm	0ppm			

For details of other possible cross-interfering gases contact City Technology.

Ordering Information

Standard mV H₂ CiTiceL MET60-014

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.