




# 3ND CiTiceL<sup>®</sup>

## Performance Characteristics

<b>Nominal Range</b>	0-100ppm
<b>Maximum Overload</b>	1000ppm
<b>Expected Operating Life</b>	Two years in air
<b>Output Signal</b>	0.37 ± 0.07 µA/ppm
<b>Resolution at 20°C</b>	0.5ppm
<b>Temperature Range</b>	-20°C to +50°C
<b>Pressure Range</b>	Atmospheric ± 10%
<b>Pressure Coefficient</b>	0.037% signal/mBar
<b>T<sub>90</sub> Response Time</b>	<35 seconds
<b>Relative Humidity Range</b>	15 to 90% non-condensing
<b>Typical Baseline Range (pure air)</b>	0 to 0.2ppm equivalent
<b>Maximum Zero Shift (+20°C to +40°C)</b>	-1ppm equivalent
<b>Long Term Output Drift</b>	<2% signal loss/month
<b>Recommended Load Resistor</b>	33 Ω
<b>Bias Voltage</b>	Not required
<b>Repeatability</b>	2% of signal
<b>Output Linearity</b>	Linear

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

## Outline Dimensions

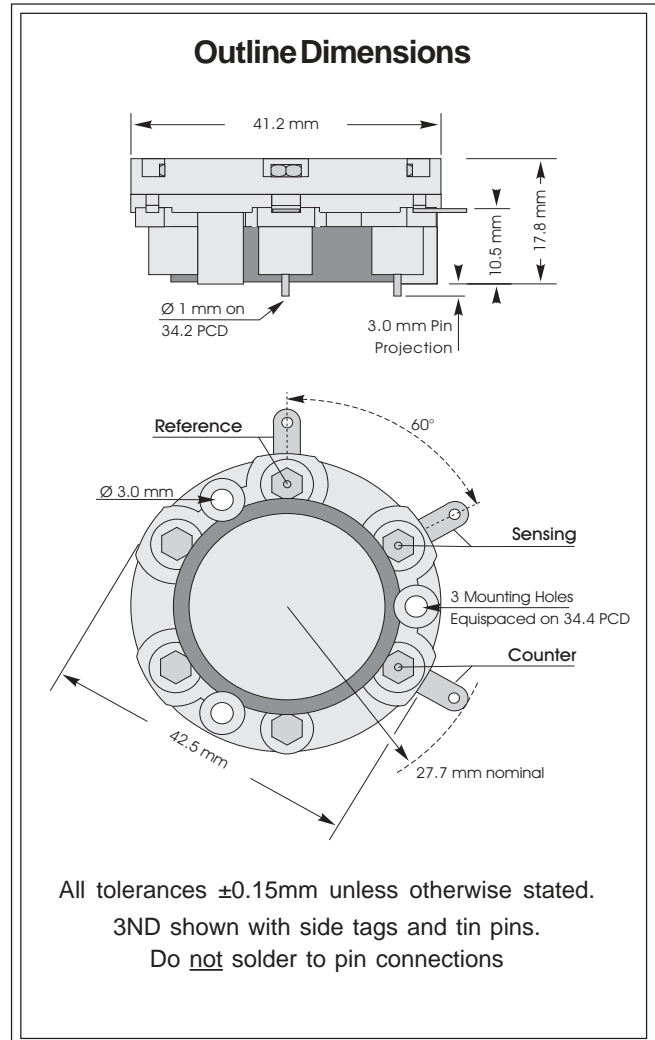


## Physical Characteristics

<b>Weight</b>	22g
<b>Position Sensitivity</b>	None
<b>Storage Life</b>	Six months in CTL container
<b>Recommended Storage Temperature</b>	0-20°C
<b>Warranty Period</b>	12 months from date of despatch

# Nitrogen dioxide CiTiceL<sup>®</sup> Specification



**3ND Nitrogen Dioxide - Output vs Temperature**

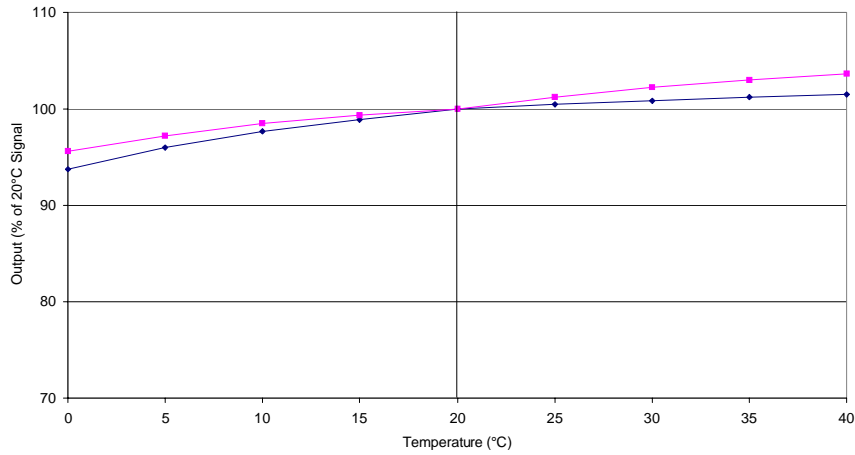

## Cross-sensitivity Data

CiTiceLs may exhibit a response to certain gases in a sample other than the target gas. The table below shows the typical response of 3ND CiTiceLs to a number of common cross-interfering gases. The figures are expressed as a percentage of the primary sensitivity (i.e. nitrogen dioxide = 100%).

<u>Gas</u>	<u>Response</u>	<u>Gas</u>	<u>Response</u>
<b>Carbon monoxide:</b>	<1%	<b>Hydrogen:</b>	< -1%
<b>Hydrogen sulphide:</b>	-40<x<0%	<b>Hydrogen chloride:</b>	< -1%
<b>Sulphur dioxide:</b>	-4<x<0%	<b>Ethylene:</b>	n/d
<b>Nitric oxide:</b>	< 1%		

\*\* For details of other possible cross-interfering gases contact City Technology.\*\*

n/d: No data, under investigation

## Ordering Information

The 3ND Nitrogen Dioxide CiTiceL is available with side tags, gold-plated PCB pins, or both PCB pins and side tags. To ensure the appropriate option is supplied care must be taken to provide the correct code when ordering.

<p><b>Type 3ND:-</b> With side tag and PCB pin connections - <b>3ND</b>                  With side tag connection - <b>3ND(S)</b>                  With gold-plated PCB pin connection - <b>3ND(G)</b></p>
--

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.